Laminated Dock Bumpers

Rotary Products Inc. 202 East High Street Ashley, OH 43003

1-800-457-5251


B4512-18

Features

Tough plies of truck tire material virtually eliminates chipping or abraision, unlike molded rubber, extruded rubber, conveyor belting or wood plank bumpers. Attractive deep black color enhances a neat, professional architectural look. Manufactured under pressure exceeding 1,500 lbs. to absorb over 80% of impact force.

of impact force.

Anchor bolts are protected by at least 3" of rubber to prevent damage.

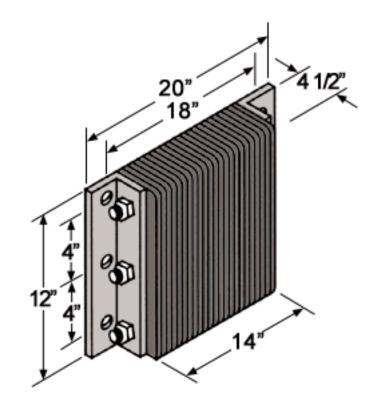


Installation

Structural mounting angles permit welded installations or provide bolting through steel

Material/Thickness

Fabric reinforced rubber pads cut from selected recycled truck tires. Rubber pads laminated between structural steel angles and secured with 3/4" steel tie rods.



Bumpers may be ordered with angles or flat plates at each end. Use a flat plate for mounting bumper next to a dock leveler, or where the space is to tight to allow the use of angles. Note: When using the flat plate, it is welded to the dock.